

PRODUCT DESCRIPTION

The product belongs to one of the series of household energy storage products that are independently designed and developed by us. It is used for energy storage and energy supply to household, commercial, UPS and other electrical equipment.

This product enjoys many merits: long cycle life, high safety standard from software protection to strong housing, exquisite looks, and easy installation, etc. It is widely used in energy storage system with off-grid inverters, grid-connected inverters and hybrid inverters.

Each battery pack is equipped with an intelligent battery management system to manage the modules efficiently.
Compared with traditional modules, it can meet the capacity storage and greatly improve the cycle life.

- Compared with indefinitional modules, in call meet the capacity storage and greatly improve the cycle in
 Matter of bigs to ab anterprise, home intelligent energy regregement enforcement and greatly improve the cycle in
- ◆National high-tech enterprise, home intelligent energy management, safe, efficient and green energy



PRODUCT DETAILS

LONGER CYCLE LIFE

Offers up to 15 times longer cycle life and 5 times longer float/ calendar life than lead acid battery.

LOW SELF-DISCHARGE

Lower self-discharge compared with lead acid battery, longer storage time without recharging.

SUPERIOR SAFETY

Multi-protection methods built inside to protect the battery from overcharge, over discharge and short circuit situation.

HIGH EFFICIENT

Higher round-trip energy efficiency of the average (92%) than lead acid battery 80% (discharge from 100% to 0% and back to 100% charged).


LIGHTER WEIGHT

About 40% weight of a comparable lead acid battery. save up to 60% in weight.

QUICK CHARGE

Short charge time compared with lead acid battery.

		1 /
http://	Lohinddoo	a c c m l
	/chinagoc	
	1011110900	

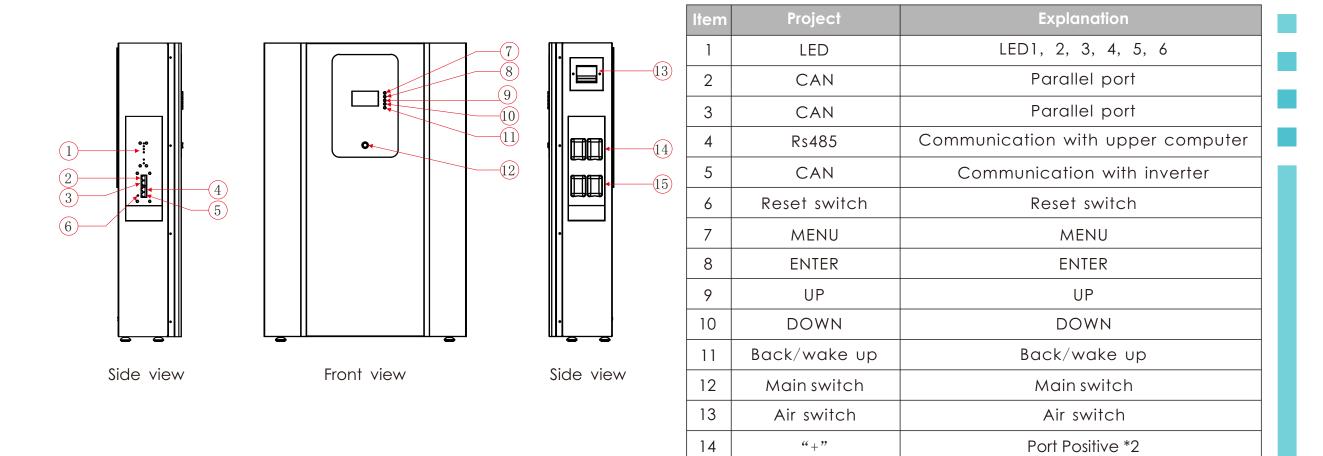

15

"_"

Port Negative *2

PRODUCT SPECIFICATION

Model	LF51150-02			
Battery Type	LiFePO4			
Nominal Voltage	51.2V			
Nominal Capacity	150Ah			
Charging Cut-off Voltage	58.4V			
Discharging Cut-off Voltage	40.8V			
Max Cont. Charging Current	100A			
Max Cont. Discharging Current	200A			
Working Temperature	0℃~55℃ (Charge)			
Working Temperature	-20℃ ~ 65℃ (Discharge)			
Cycle Life	≥6000			
Product Size	800*435*175mm			
Weight	49kg			




51.2V 150AH BATTERY PACK

https://chinagode.com/


PACKAGING SPECIFICATION

P/N	Power	Packing Size(CM)					
		L	W	н	PCS/CIN	CBM/CTN	G.W/CTN(KGS)
LF51150-02	51.2V 150AH	86.50	50.00	31.50	1	0.1362	54.00

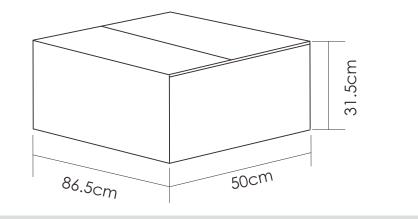


DC Cable Connection

1. Single Unit



2.Multi-Units in Parallel (4 sets as an example) Max. Number Of Parallel: 4 Sets




Master Pack and Slave Pack can be used as single unit as well as multi-units (in parallel) mode. The customer must inform supplier if multi-units mode is required.

Multi-Units Connection

Single Unit Connection

ROUTE DIAGRAM

51.2V 150AH BATTERY PACK

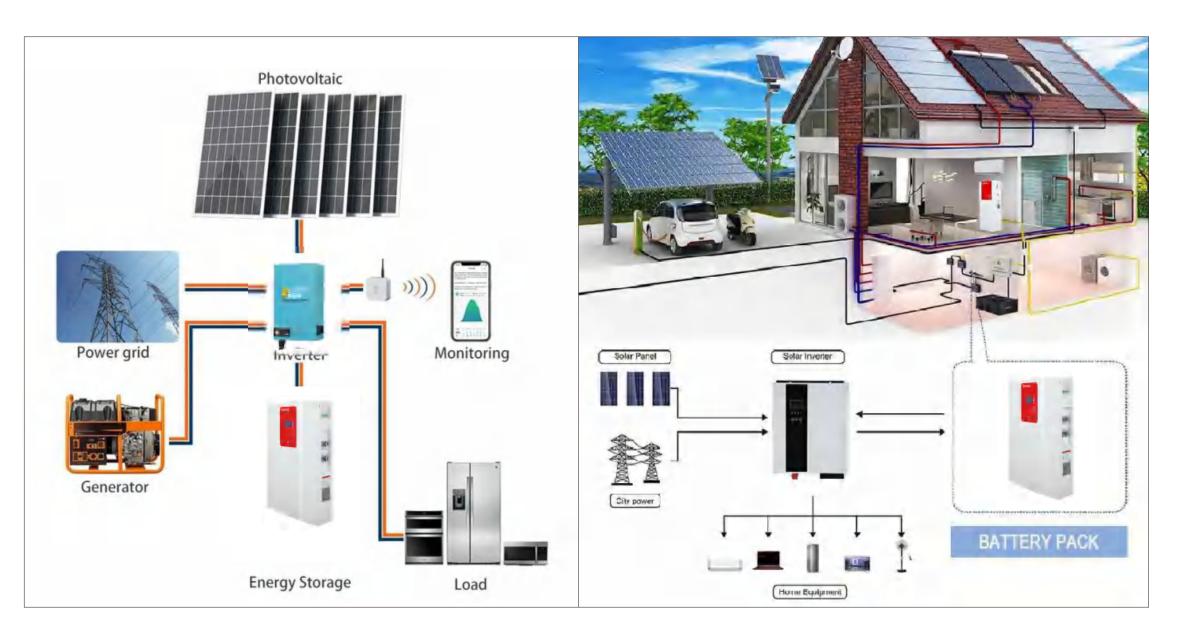

VERSATILE IN ONE BATTERY PACK

BATTERY GUARANTEE OF QUALITY

51.2V 150AH BATTERY PACK





Battery Cells

High-end battery cells keep every cell's voltage, resistance, capacity, discharging always in sync.

Battery Protector



High precision IC keep performance more stable protect over load, over charge, over discharge, short circuit, over voltage,over current keep battery pack always safe and long life span.

Precisior 3 Fully auto

Precision Welding Machine

Fully automatic precision welding machine can ensure that every battery can be welded firmly to prevent the danger of short circuit or power failure.

Aging Test Machine

every battery pack need to thorough charging and discharging test by the aging test machine to keep 100% qualified.